


最高使用回転数
allowable speed
最高使用转速

軸径
Shank dia
柄直径

ケース入数
pcs / pac
1盒数

粒度
grain size
粒度

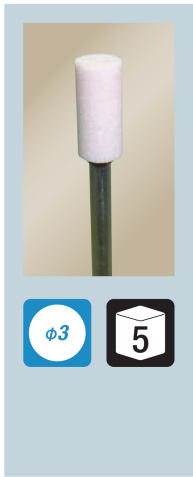


φ3 5

砥粒の材質 結合剤 結合度
PW ピンク V P


#120

90,000 min⁻¹




G3531

72,000 min⁻¹



G3532


45,600 min⁻¹



G3533


#80

42,000 min⁻¹



G3534

32,000 min⁻¹




G3535

G 砥石

#120


80,000 min⁻¹



G3536

#80

45,600 min⁻¹




G3537

NEW

#120


90,000 min⁻¹



G3538

NEW


50,000 min⁻¹



G3539

NEW

40,000 min⁻¹



G3540