


フラップサンダー

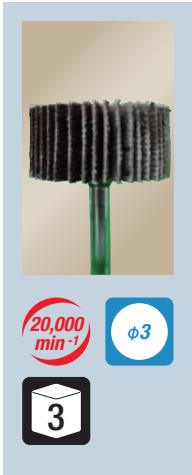


20,000 min<sup>-1</sup>

φ3


3

砥粒の材質

A



D	φ10	φ15	φ20	φ25
# 60	S1106	S1206	S1306	S1406
#120	S1112	S1212	S1312	S1412
#240	S1124	S1224	S1324	S1424
#320	S1132	S1232	S1332	S1432
#600	S1160	S1260	S1360	S1460

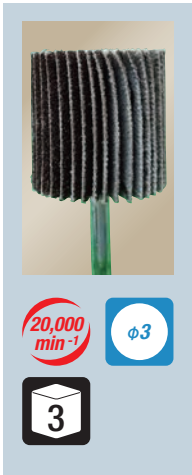


20,000 min<sup>-1</sup>

φ3


3

砥粒の材質

A



D	φ10	φ15	φ20	φ25
# 60	S1506	S1606	S1706	S1806
#120	S1512	S1612	S1712	S1812
#240	S1524	S1624	S1724	S1824
#320	S1532	S1632	S1732	S1832
#600	S1560	S1660	S1760	S1860

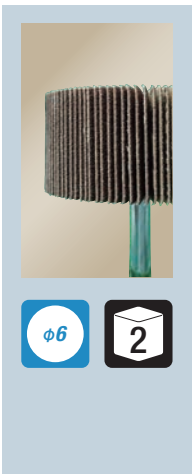


φ6

2

砥粒の材質

A

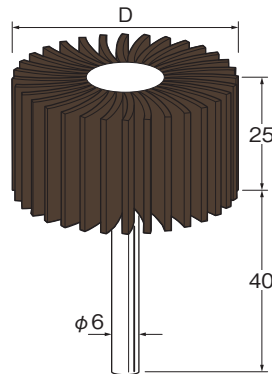

1

D	φ30	φ40	φ50	φ60	φ80	φ100
# 60	S1911	S1921	S1931	S1941	S1951	S1955
# 80	S1912	S1922	S1932	S1942	S1952	S1956
#100	S1913	S1923	S1933	S1943	S1953	S1957
#120	S1914	S1924	S1934	S1944	S1954	S1958
最高使用回転数	20,000min <sup>-1</sup>			18,000min <sup>-1</sup>	15,000min <sup>-1</sup>	9,000min <sup>-1</sup>